Bell Panel

350-BELL

Equipment Manufacturer

PLAYWORLD
The world needs play.

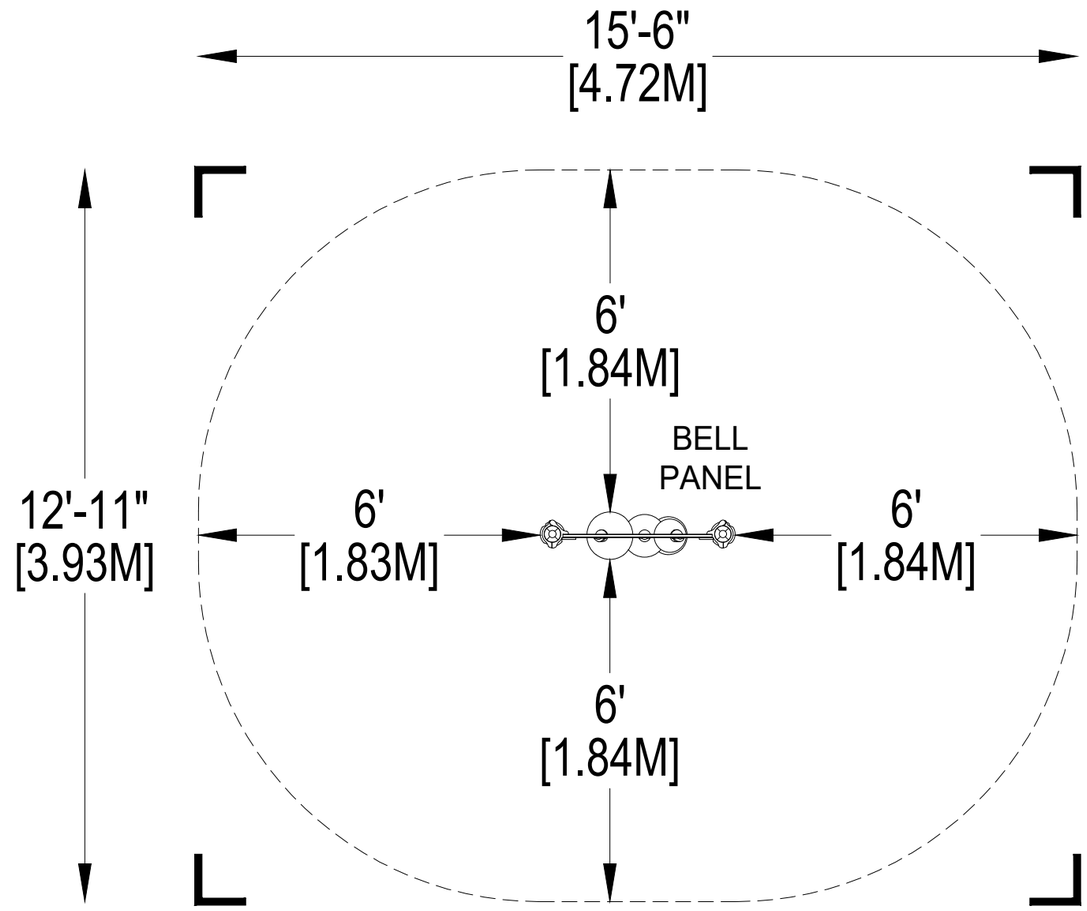

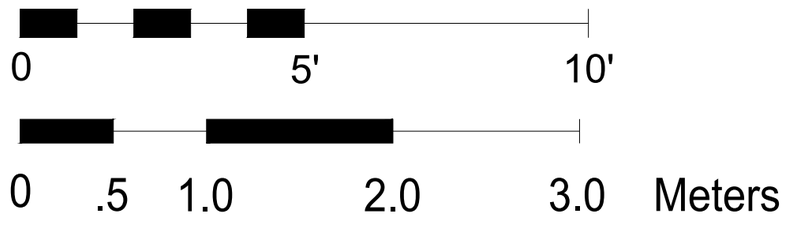

*PLAYGROUND SUPERVISION REQUIRED

PLAYWORLD

PLAYWORLD SYSTEMS, INC.
1000 Buffalo Road
Lewisburg, PA
17837-9795 USA

EQUIPMENT SIZE:
3'5" x 0'10" x 4'6"
1,04M x 0,25M x 1,37M

USE ZONE:
15'6" x 12'11"
4,72M x 3,93M

AREA:	PERIMETER:
169 SqFt.	**47 Ft.**
15,7 SqM.	14,33M

FALL HEIGHT:
0 Ft.
0 M

USER CAPACITY:	AGE GROUP:
2	**2-12**

- ✓ ASTM F1487-25
- ✓ CPSC #325

PROJECT NO:	SCALE:
350-BELL_N	**3/8"=1'-0"**
DRAWN BY: **M. MERTZ**	Paper Size **B**
DATE: **14-NOV-17**	

BELL PANEL

CATALOG PRE-DESIGN

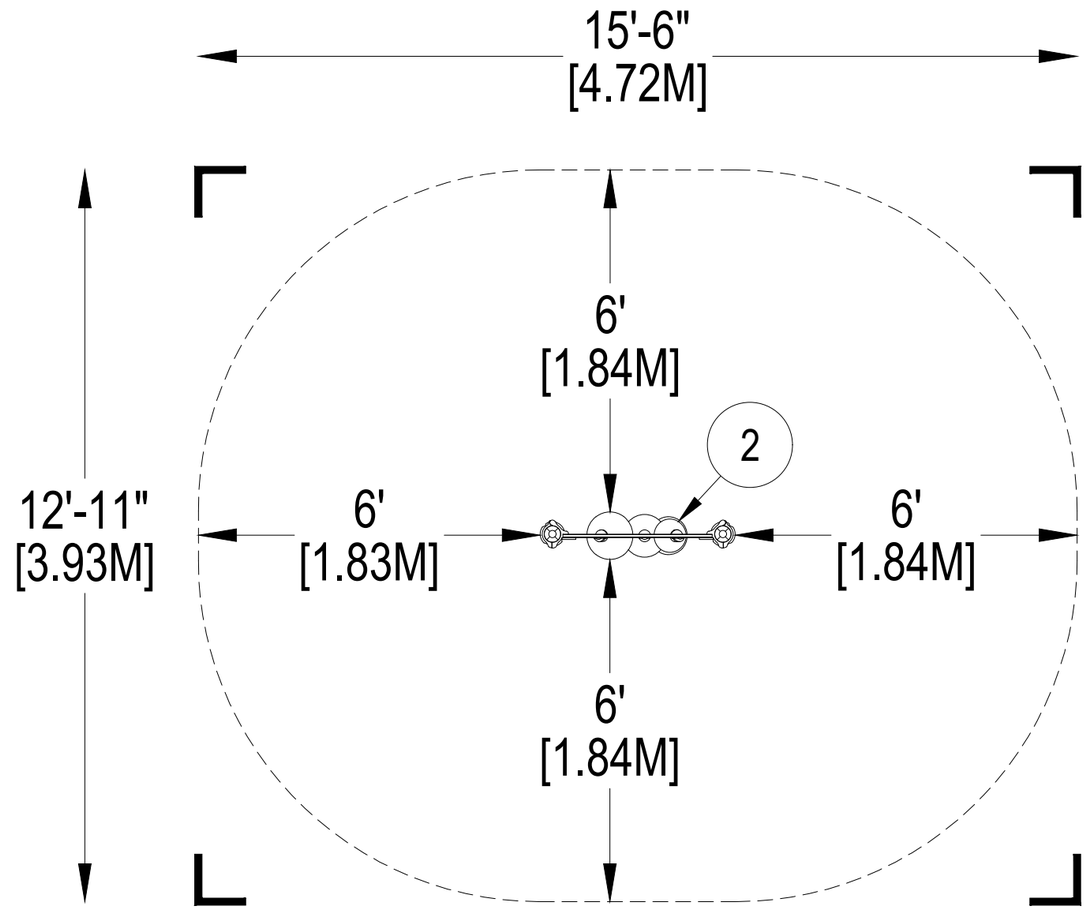

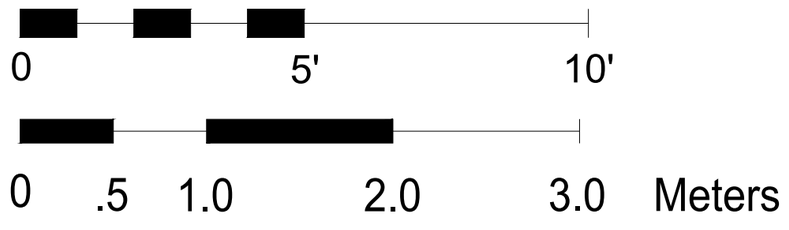

*PLAYGROUND SUPERVISION REQUIRED

PLAYWORLD SYSTEMS, INC.
1000 Buffalo Road
Lewisburg, PA
17837-9795 USA

EQUIPMENT SIZE:
3'5" x 0'10" x 4'6"
1,04M x 0,25M x 1,37M

USE ZONE:
15'6" x 12'11"
4,72M x 3,93M

AREA:
169 SqFt.
15,7 SqM.

PERIMETER:
47 Ft.
14,33M

FALL HEIGHT:
0 Ft.
0 M

USER CAPACITY:
2

AGE GROUP:
2-12

- ✓ ASTM F1487-25
- ✓ CPSC #325

PROJECT NO:
350-BELL_N

SCALE:
3/8"=1'-0"

DRAWN BY:
M. MERTZ

Paper Size
B

DATE:
14-NOV-17

BELL PANEL

CATALOG PRE-DESIGN

DETAIL 1

Support Post, Spiral Slide and Post Footing Detail

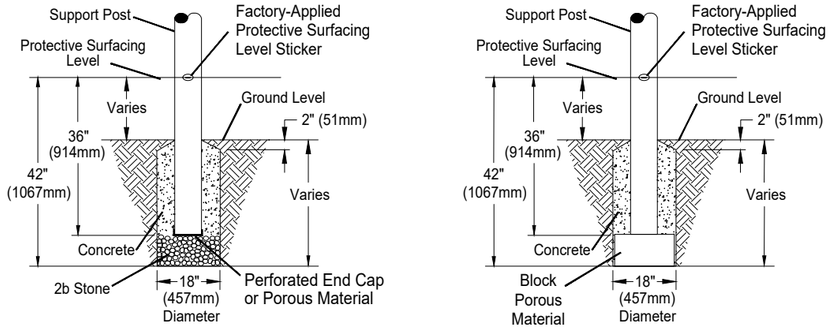

STONE OPTION OR BLOCK OPTION

When utilizing Post Extensions adjust depth of footing/concrete accordingly.

DETAIL 2

GroundZerO, Cantilever and "T" Post Footing Detail

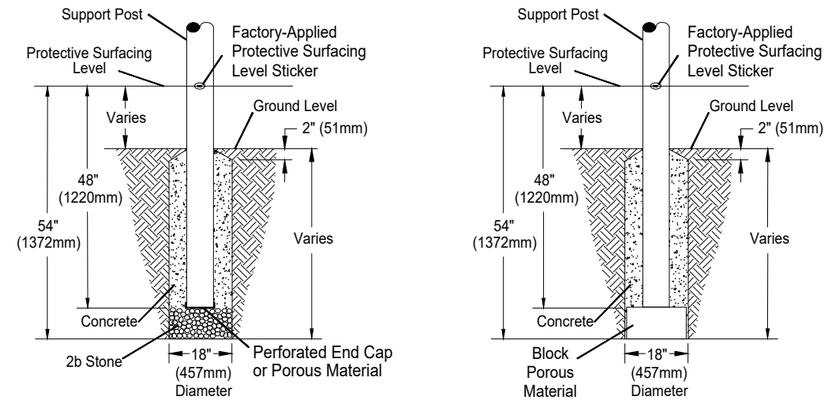

STONE OPTION OR BLOCK OPTION

DETAIL 3

Component Footing Detail

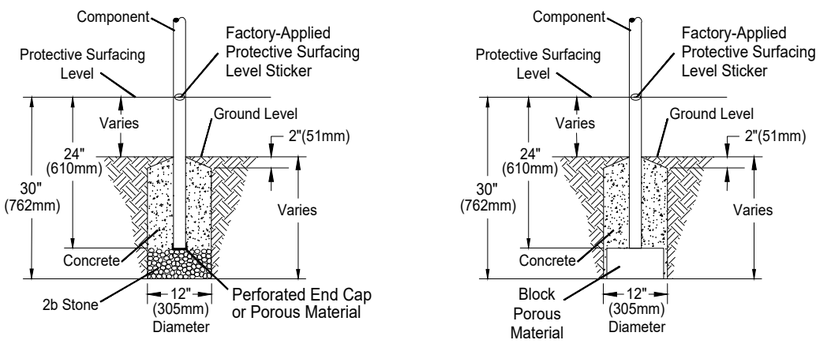

STONE OPTION OR BLOCK OPTION

DETAIL 4

Surface Mount Detail

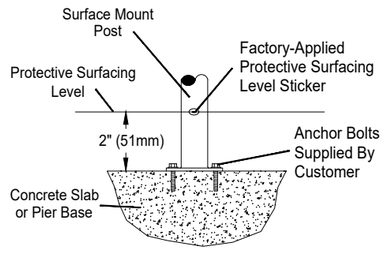

DETAIL 5

Shade Post Footing Detail

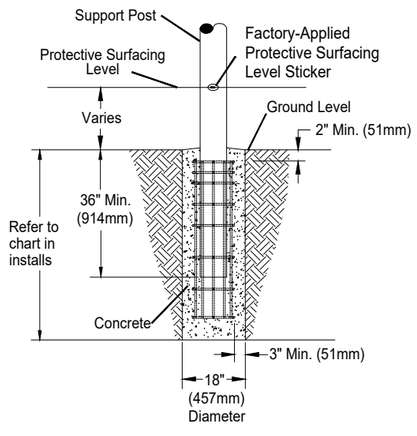

SITE NOTES:

1) The site plan provided must be checked against the actual site area to ensure that placement of your structure meets required clearances.
2) The dimensions labeled are for location of footing holes, not exact placement of equipment. Assemble, plumb, and level equipment before pouring concrete.
3) There must be a minimum distance of 6' (1830mm) between any obstacle, sidewalk, etc., and your structure.
4) Slides must have a use zone that extends out from the lower exit section of the slide a distance that is at least 6' (1830mm) or equal to the vertical distance from the highest point of the sliding surface to the top of the protective surfacing, whichever is greater. The slide use zone should not extend greater than 8' (2438mm) from the end of the lower exit section.
5) The complete area, including the space under and around the equipment, must be covered with an impact attenuating material. See the 1997 publication, "Handbook for Public Playground Safety", published by the U.S. Consumer Product Safety Commission, for guidelines and recommendations on the type and depth of surfacing material. For a copy of the "Handbook for Public Playground Safety", write to: **U.S. Consumer Product Safety Commission, Office of Information and Public Affairs, Washington, D.C. 20207**

INSTALLATION NOTES:

1) Paved surfaces, such as asphalt and concrete, are not acceptable for use under your structure.
2) It is the consumer's responsibility to check with local utilities prior to excavating footings for any underground utility lines that may exist within the installation area.
3) It is the consumer's responsibility to check local soil conditions and drainage within the site area. Inquire with local contractors for appropriate recommendations.
4) If the structure is to be installed across uneven terrain, maintain the support post mark for protective surfacing level at the lowest grade. Adjust other footings accordingly.
5) The base of footings must be below frost lines.
6) Do not encase the bottom of support posts in concrete. Place all posts directly on packed stone.
7) Assemble the entire structure before pouring concrete unless specifically instructed to do so in the individual component installation instructions.
8) Read completely the installation instructions provided with your structure prior to beginning construction.

***PLAYGROUND SUPERVISION REQUIRED**

PLAYWORLD SYSTEMS, INC.
1000 Buffalo Road
Lewisburg, PA
17837-9795 USA

FOOTING LEGEND



COMPONENT FOOTING (DETAIL 3)

SPIRAL SLIDE CENTER POST FOOTING (DETAIL1)



SUPPORT POST FOOTING (DETAIL 1 or 4)
(136" INDICATES POST LENGTH)
THICK BORDER INDICATES POST EXTENSION LOCATION

CANTILEVER, "T" POST, AND COMPONENT POST FOOTING (DETAIL 2)
(ZZCH1850 INDICATES PART NUMBER)

GROUND ZERO POST FOOTING (DETAIL 2)
(148" INDICATES POST LENGTH)

SHADE HAT POST FOOTING (DETAIL 5)
(210" INDICATES POST LENGTH)

FOOTING DETAIL	SCALE: NOT TO SCALE
DRAWN BY: PW CAD	Paper Size B
DATE: 18-NOV-20	

POST FOOTING DETAILS

PLAYMAKERS / CHALLENGERS

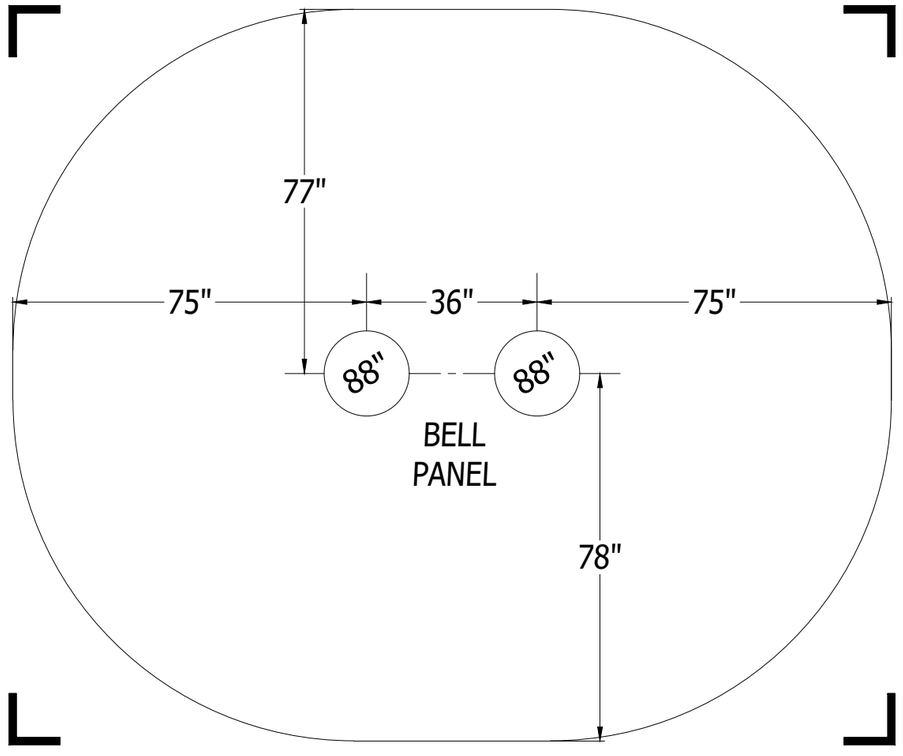

*PLAYGROUND SUPERVISION REQUIRED

PLAYWORLD

PLAYWORLD SYSTEMS, INC.
1000 Buffalo Road
Lewisburg, PA
17837-9795 USA

FOOTING LEGEND

COMPONENT FOOTING (DETAIL 3)

SPIRAL SLIDE CENTER POST FOOTING (DETAIL1)

112"

SUPPORT POST FOOTING (DETAIL 1 or 4)
(112" INDICATES POST LENGTH)

ZZCH 1850

CANTILEVER, "T" POST, AND COMPONENT POST FOOTING (DETAIL 2)
(ZZCH1850 INDICATES PART NUMBER)

144" GZ

GROUND ZERO POST FOOTING (DETAIL 2)
(144" INDICATES POST LENGTH)

PROJECT NO:	SCALE:
350-BELL_N	**3/8"=1'-0"**
DRAWN BY: **M. MERTZ**	Paper Size **B**
DATE: **14-NOV-17**	

BELL PANEL

CATALOG PRE-DESIGN